

PARADA *Spec-X*

Aggressive Design Meets Responsive Control

Yokohama's Parada Spec-X is specifically designed as an inch-up fitment for today's heavier vehicles. Boasting fitments in 20" to 24" sizes, drivers of these immaculate SUVs and light trucks can have the aggressive looks they crave without sacrificing the performance capabilities they have come to expect from Yokohama.

Aggressive Directional Design

Unique tread design and sidewall treatment add a distinctive, stylish look. Its directional tread pattern increases acceleration and braking capabilities as well as resistance to hydroplaning.




Perpetual Contact Patch

The solid center curved ribs provide excellent grip in dry weather, maintain lateral stability in wet conditions and promote a smooth, quiet ride.



Reinforced Shoulder Blocks

Provide stability during cornering and more even wear for today's heavier vehicles and plus-sized fitments.



Circumferential Center Groove

Deep, wide center groove provides outstanding water evacuation.



Dimples

Relieve heat buildup for more even wear.

Variable Pitch Technology


Creates a more comfortable ride by reducing pattern noise and minimizing uneven wear.

Rim Protector Sidewall

Protects premium wheels against damage.

Extensive Size Line-Up

With a full line-up of sizes, Parada Spec-X will enhance the performance and appearance of a broad range of vehicles.

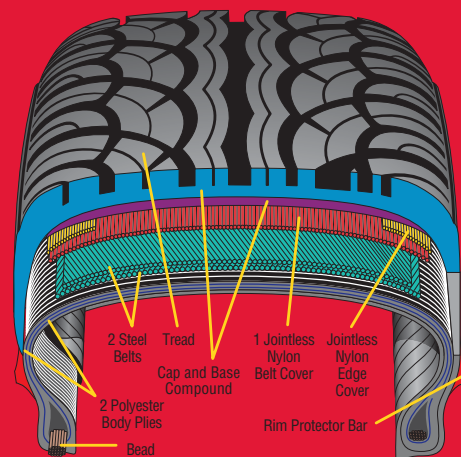

Construction may vary by size.

For Vehicles Mentioned Below and Many Others:

Cadillac Escalade	Ford Explorer
Chevy Avalanche	Ford F-150
Chevy Silverado	Hummer H2
Chevy Tahoe	Infiniti FX35
Chevy Trailblazer	Infiniti FX45
Chrysler 300C	Land Rover
Dodge Charger	Lexus RX330
Dodge Durango	Nissan Murano
Dodge Magnum	Nissan Titan
Dodge Ram 1500	Range Rover
Ford Expedition	Toyota Land Cruiser
	Volvo XC-90

Ultra-High Performance Speed Ratings: V-Speed Rated

UTQG 420/A/A
M+S (Mud and Snow Rated)





Size Chart

Tire Size	Part No.	UTQG Rating	Measuring Rim Width	Approved Rim Width	Overall Width	Overall Diameter	Tread Width	Tread Depth (32/in)	Static Radius (Inches)	Revs Per Mile	Max Load Cold Inflation Pressure
255/40R20 101V	00224	420/A/A	9.0	8.5 - 10.0	10.1	28.1	8.9	11	13.2	739	1819@50
255/45R20 105V	00225	420/A/A	8.5	8.0 - 9.5	9.9	29.1	8.8	11	13.6	713	2039@50
265/50R20 111V	00228	420/A/A	8.5	7.5 - 9.5	10.7	30.6	8.9	11	14.1	679	2403@50
275/45R20 110V	00226	420/A/A	9.0	8.5 - 10.5	10.6	29.9	9.4	11	13.9	695	2337@50
275/55R20 117V	00231	420/A/A	8.5	7.5 - 9.5	10.9	31.9	9.0	11	14.7	650	2833@50
285/50R20 112V	00229	420/A/A	9.0	8.0 - 10.0	11.5	31.3	9.5	11	14.4	664	2469@50
295/45R20 114V	00227	420/A/A	10.0	9.5 - 11.0	11.6	30.6	10.2	11	14.1	679	2601@50
305/50R20 120V	00230	420/A/A	9.5	8.5 - 11.0	12.4	32.2	10.2	11	14.7	646	3086@50
*265/30R22 97V	00217	420/A/A	9.5	9.0 - 10.0	10.2	28.6	9.6	11	13.6	727	1609@50
*265/35R22 102V	00218	420/A/A	9.5	9.0 - 10.5	10.4	29.5	9.3	11	13.9	704	1874@50
265/40R22 106V	00220	420/A/A	10.0	9.0 - 10.5	10.6	30.5	9.3	11	14.3	681	2094@50
*285/35R22 106V	00219	420/A/A	10.0	9.5 - 11.0	11.0	30.1	10.0	11	14.2	690	2094@50
*285/45R22 114V	00222	420/A/A	9.5	9.0 - 10.5	10.9	32.2	9.8	11	15.0	645	2601@50
305/40R22 114V	00221	420/A/A	11.0	10.0 - 12.0	12.2	31.7	10.7	11	14.8	655	2601@50
305/45R22 118V	00223	420/A/A	10.0	9.5 - 11.5	11.5	32.9	10.5	11	15.2	632	2910@50
285/35R23 107V	00214	420/A/A	11.0	9.5 - 11.0	11.7	31.1	10.0	11	14.6	669	2149@50
285/40R23 111V	00215	420/A/A	11.0	9.5 - 11.0	12.0	32.0	10.0	11	15.0	648	2403@50
*295/30R23 104V	00213	420/A/A	11.0	10.0 - 11.0	11.9	30.2	10.6	11	14.3	688	1984@50
305/40R23 115V	00216	420/A/A	11.0	10.0 - 12.0	12.2	32.7	10.7	11	15.3	635	2679@50
295/35R24 110V	00210	420/A/A	11.0	10.0 - 11.5	11.9	32.3	10.3	11	15.2	643	2337@50
305/35R24 112V	00211	420/A/A	11.0	10.0 - 12.0	12.1	32.7	10.7	11	15.4	636	2469@50
315/35R24 114V	00212	420/A/A	11.0	10.5 - 12.5	12.4	32.9	11.0	11	15.5	632	2601@50

*Available Fall 2006

Features and Benefits

Aggressive Directional Design

increases acceleration and braking capabilities.

Perpetual Contact Patch

provides excellent grip in dry weather, maintains lateral stability in wet conditions and promotes a smooth, quiet ride.

Reinforced Shoulder Blocks

provide stability during cornering and more even wear for today's heavier vehicles and plus-sized fitments.

Circumferential Center Groove

provides outstanding water evacuation.

Dimples

relieve heat buildup for more even wear.

Variable Pitch Technology

creates a more comfortable ride by reducing pattern noise and minimizing uneven wear.

Rim Protector Sidewall

protects premium wheels against damage.

Extensive Size Line-Up

will enhance the performance and appearance of a broad range of vehicles.



M-133-0306/0706W